


SEDNA®

l i g h t i n g



LED Horizon™ Series - Linear Luminaires

Horizon™ series linear luminaires engineered for a high-end finish across a range of installations & applications.

Options of single & double configuration for wall mount, suspension or continuous linear suspension make this luminaire highly suited to commercial applications such as reception, office, retail & general public spaces. Utilising a series of OMNI® light engines, luminaire benefits from industry leading efficacy of 95lm/W, with added benefit of long-term maintenance & serviceability of luminaire possible. **Supplied with fixing kit suitable for both ceiling mounting suspension, or wall mount (single only),** 1210mm linear design with a superior lumen output up to 2,100lm, for ample lux levels across a range of environments. Further options of dimmable: DALI (-DL) / 1-10V (-AD), as well as built-in microwave sensor (-MI) for occupancy detection, or built-in PIR sensor (-PIR) for occupancy detection and daylight dimming functionality. 3-hour emergency version - maintained (M3) / non-maintained (NM3) also available with self-test and LED indicator light (SDHRZ-EM).

Product information

Rated life span of +45,000 hours / No UV or IR emissions / Immediate start & flicker free / Environmentally friendly & part recyclable: no mercury or other hazardous materials / Lightweight powder coated aluminium housing / M3/NM3 Emergency version also available / Optional built-in microwave detection / Optional built-in PIR sensor with daylight dimming function & occupancy detection


Code	Nominal Size	Lumen Output	Power Consumption	Light Engine
SDHORZ-SI	1210mm x 70mm x 40mm	2,100lm	22W	1 x SDOMNI1140
SDHORZ-TW	1210mm x 185mm x 40mm	4,800lm	51W	2 x SDOMNI1140

Available in the following lumen finishes:



Pure White

Other colours are available on request

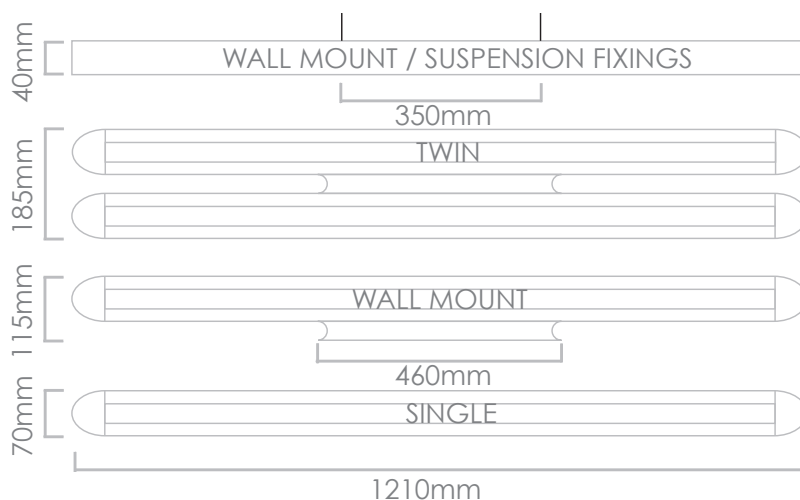

Technical Specifications

Beam Angle: 120°

Luminous Efficacy: up to 95lm/W

Input Voltage: 100-280V AC

High Colour Rendering Index >80Ra

Light Engine Type: OMNI® Light Engines

Operating Temperature: -20°C to 50°C

Colour Temperature: PW 5500-6000K
(Others available on request)

LED Horizon™ Series

Suspended / Wall-mount

Pure White