

---

SDIP65-1500-S

---

Light Output Ratio:	100.0%
Luminaire Power:	27.3W

---

C Range: 0 - 180DEG  
Test Speed: MEDIUM  
Temperature: 25DEG  
Operators: Mei Yuanping  
Test Date: 2014-3-4

$\gamma$  Range: 0 - 90DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
Humidity: 90.0%

## LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: LED Waterproof Tube Fixture	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Sedna LED Ltd	SUR.:	PROTECTION ANGLE:

MODEL:	SDIP65-1500-S
NORMALPOWER(W):	27.3W
RATED VOLTAGE(V)	230v
NORMALFLUX(lm):	2657.95LM
LAMPS INSIDE	1PC
TESTVOLTAGE:	230V
IMAX(cd):	967.1
BEAMANGLE:	105.07DEG
EFFENCY:	97.4lm/W

## LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED Waterproof Tube Fixture	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Sedna LED Ltd	SUR.:	PROTECTION ANGLE:

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

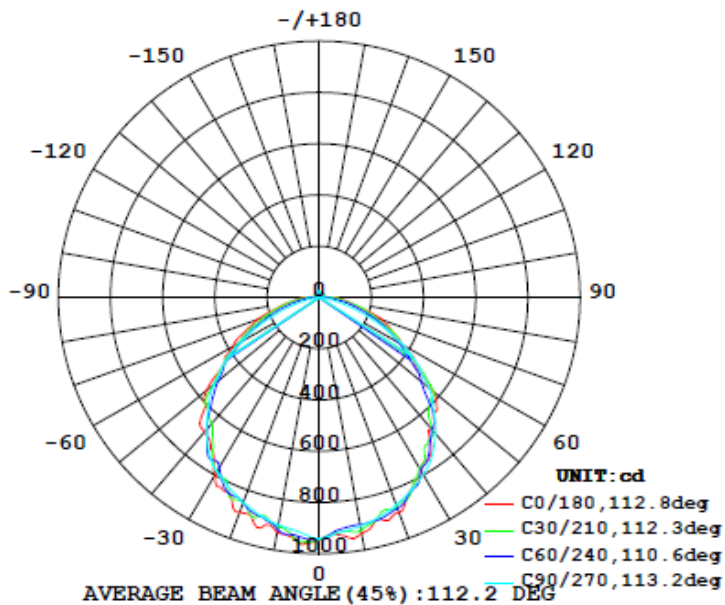


C Range: 0 - 180DEG  
Test Speed: MEDIUM  
Temperature: 25DEG  
Operators: Mei Yuanping  
Test Date: 2014-3-4

$\gamma$  Range: 0 - 90DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
Humidity: 90.0%

## LDC(Linear)

NAME: LED Waterproof Tube Fixture	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Sedna LED Ltd	SUR.:	PROTECTION ANGLE:

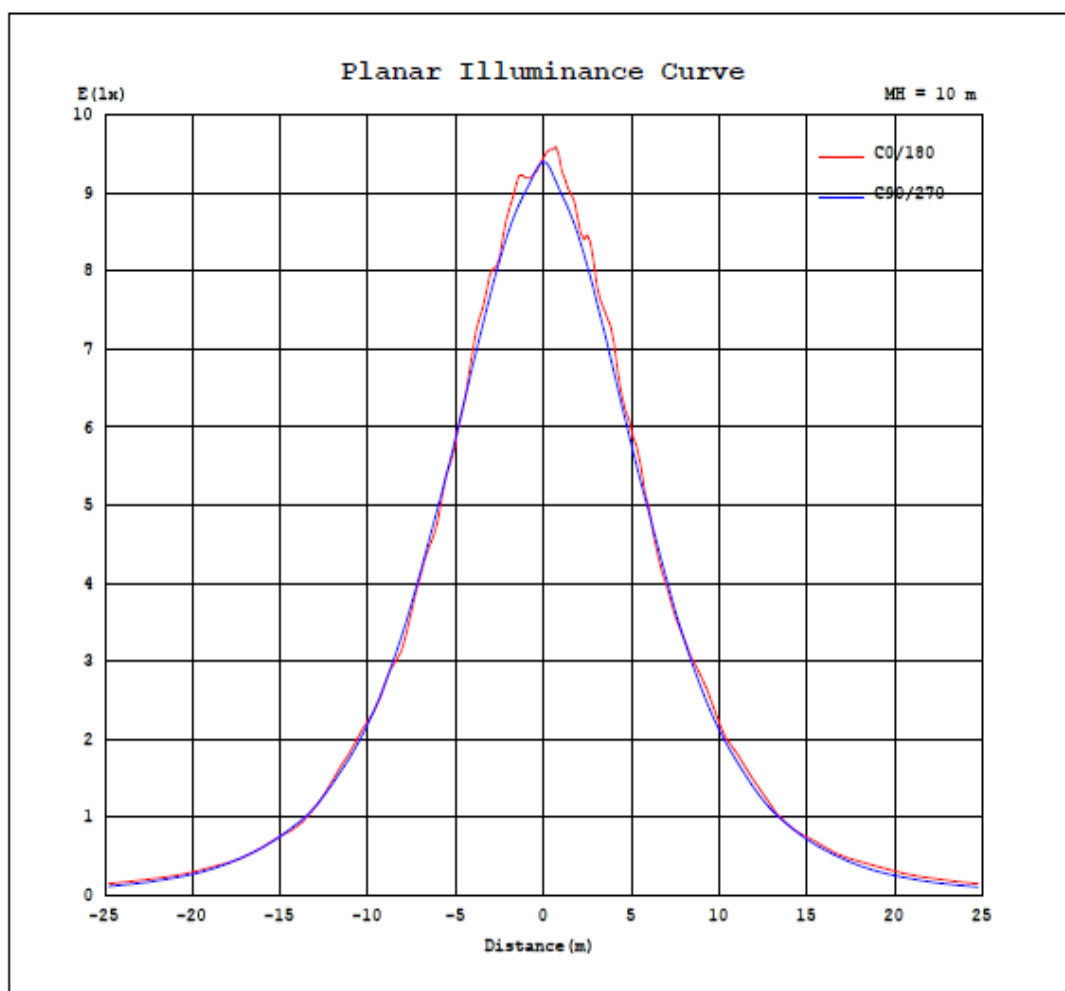


C Range: 0 - 180DEG  
Test Speed: MEDIUM  
Temperature: 25DEG  
Operators: Mei Yuanping  
Test Date: 2014-3-4

$\gamma$  Range: 0 - 90DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
Humidity: 90.0%

## Lux distance Curve

NAME: LED Waterproof Tube Fixture	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Sedna LED Ltd	SUR.:	PROTECTION ANGLE:

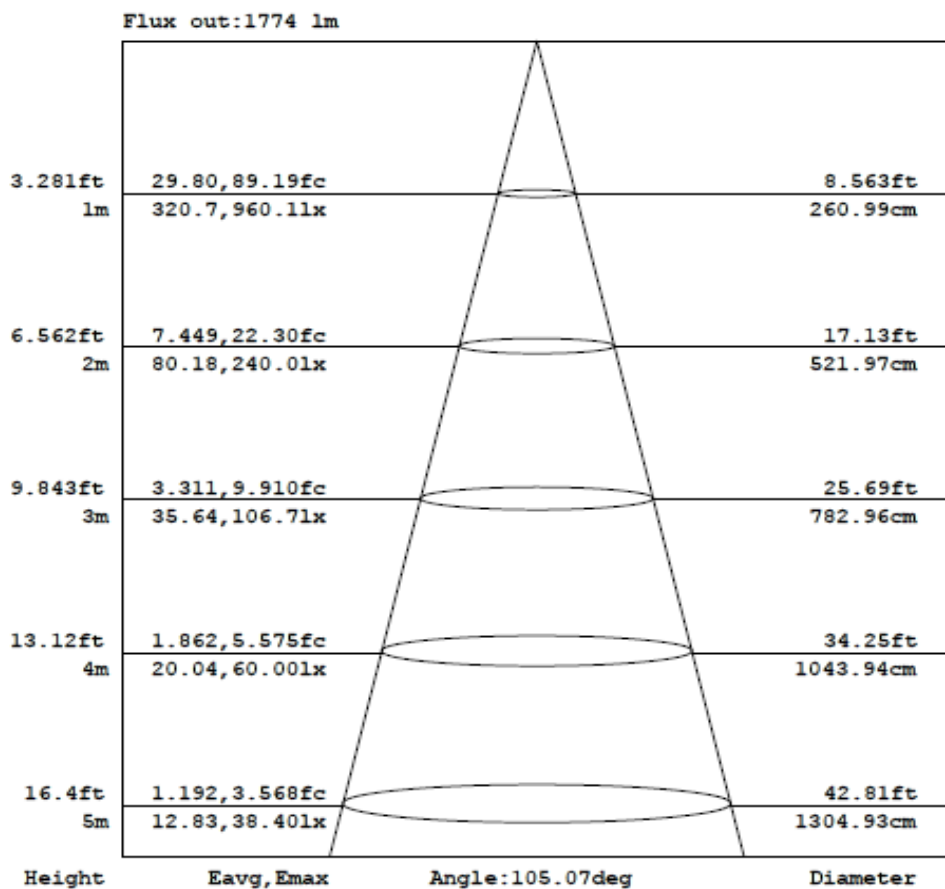

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 180DEG  
 Test Speed: MEDIUM  
 Temperature: 25DEG  
 Operators: Mei Yuanping  
 Test Date: 2014-3-4

γ Range: 0 - 90DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity: 90.0%

## Luminance Diagram

NAME: LED Waterproof Tube Fixture	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Sedna LED Ltd	SUR.:	PROTECTION ANGLE:

