

SDIP65-1500-T

| | |
|---------------------|--------|
| Light Output Ratio: | 100.0% |
| Luminaire Power: | 55.2W |


LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|-----------------------------------|-------|-------------------|
| | | |
| NAME: LED Waterproof Tube Fixture | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Sedna LED Ltd | SUR.: | PROTECTION ANGLE: |

| | |
|------------------|---------------|
| MODEL: | SDIP65-1200-T |
| NORMALPOWER(W): | 55.2W |
| RATED VOLTAGE(V) | 230v |
| NORMALFLUX(lm): | 5169.2LM |
| LAMPS INSIDE | 1PC |
| TESTVOLTAGE: | 230V |
| IMAX(cd): | 1857 |
| BEAMANGLE: | 101.7DEG |
| EFFENCY: | 93.64m/W |

LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|-----------------------------------|-------|-------------------|
| NAME: LED Waterproof Tube Fixture | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Sedna LED Ltd | SUR.: | PROTECTION ANGLE: |

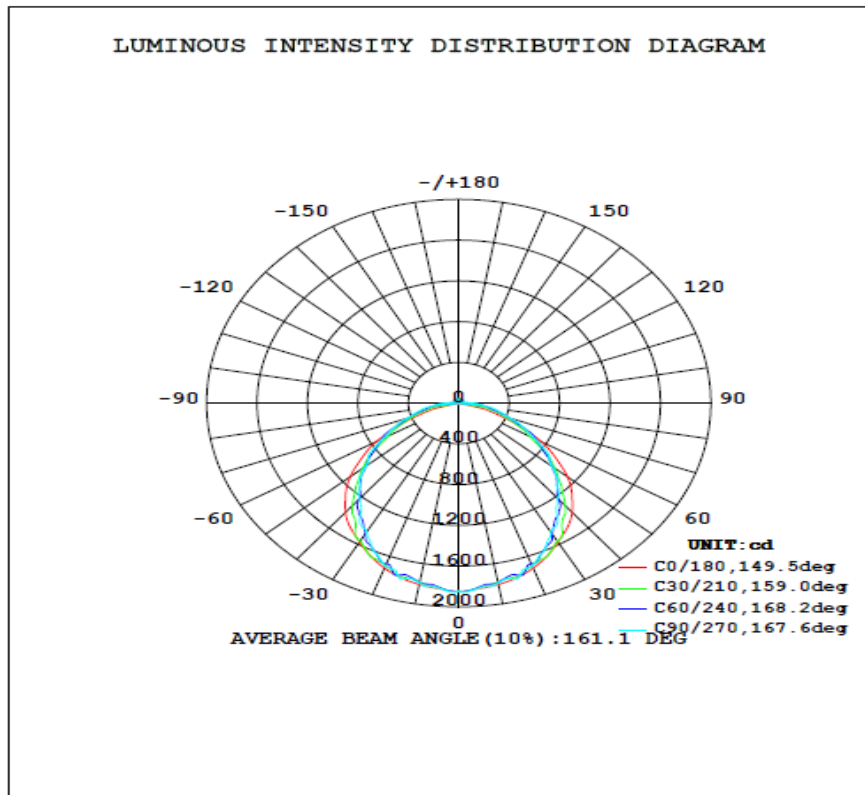

C Range: 0 - 180DEG

Test Speed: MEDIUM

Temperature: 25DEG

Operators: Mei Yuanping

Test Date: 2014-2-20


 γ Range: 0 - 90DEG

Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.279

Humidity: 90.0%

LDC(Linear)

| | | |
|-----------------------------------|-------|-------------------|
| NAME: LED Waterproof Tube Fixture | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Sedna LED Ltd | SUR.: | PROTECTION ANGLE: |

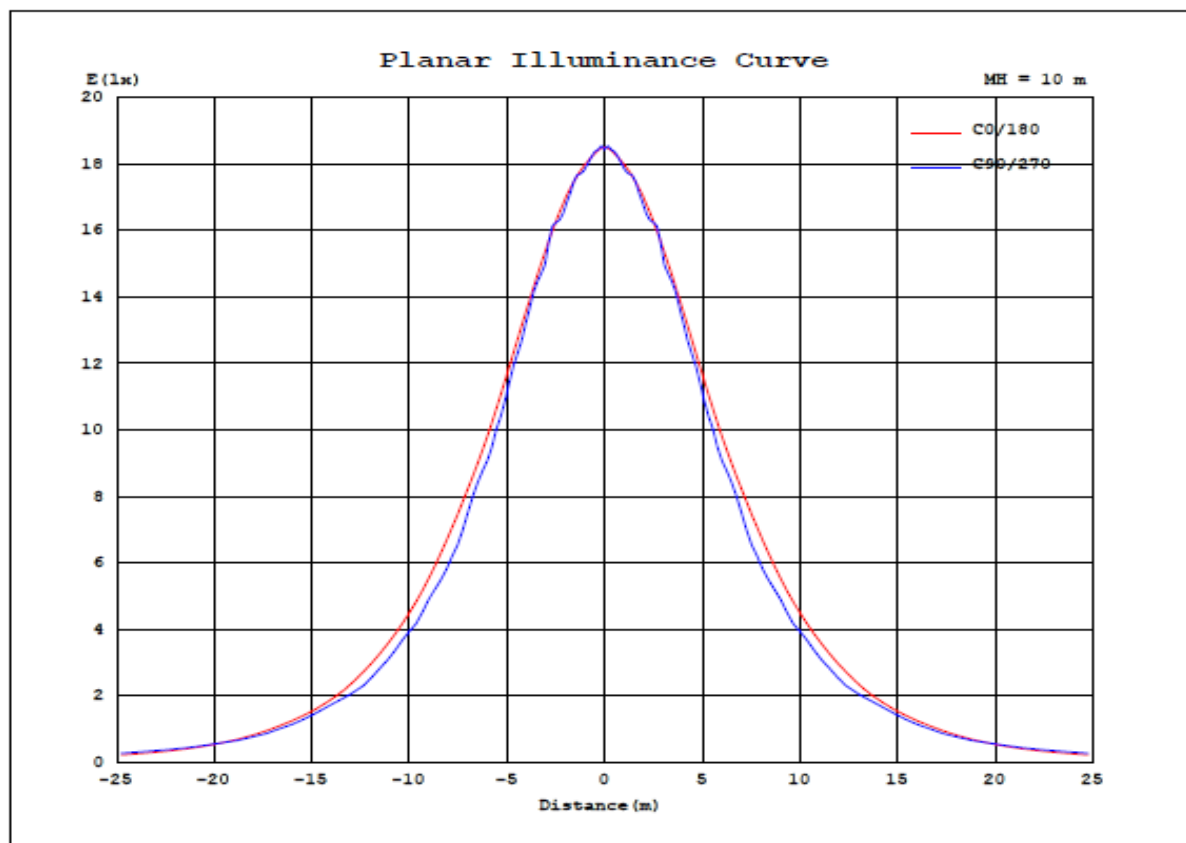


C Range: 0 - 180DEG
Test Speed: MEDIUM
Temperature: 25DEG
Operators: Mei Yuanping
Test Date: 2014-2-20

γ Range: 0 - 90DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.279
Humidity: 90.0%

Lux distance Curve

| | | |
|-----------------------------------|-------|-------------------|
| NAME: LED Waterproof Tube Fixture | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Sedna LED Ltd | SUR.: | PROTECTION ANGLE: |

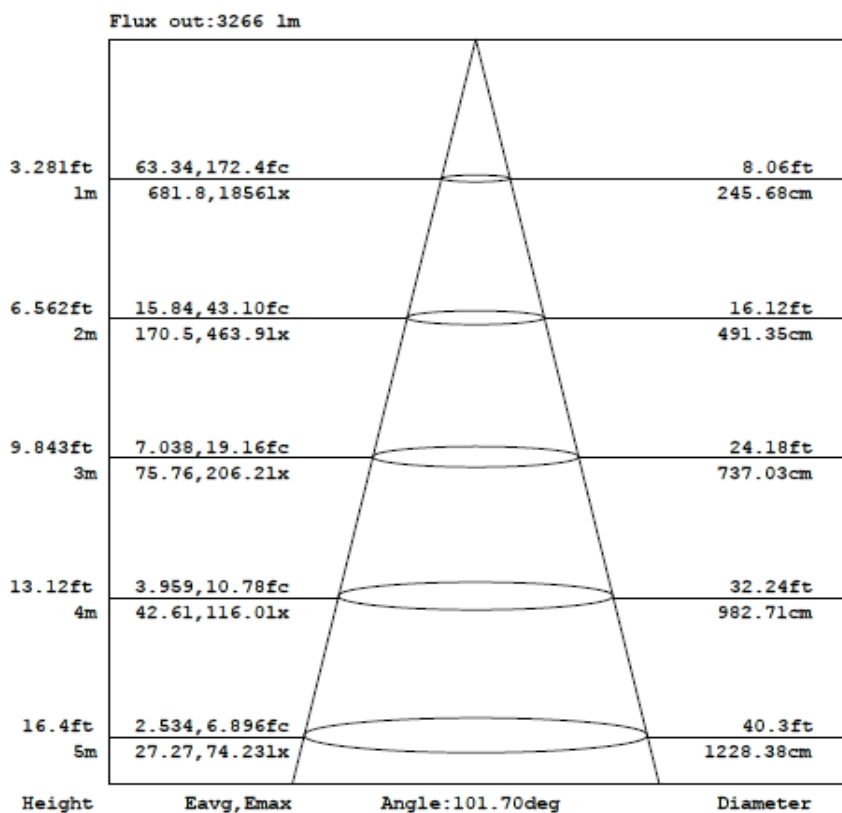

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 180DEG

Test Speed: MEDIUM

Temperature: 25DEG

Operators: Mei Yuanping

Test Date: 2014-2-20


γ Range: 0 - 90DEG

Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.279

Humidity: 90.0%

Luminance Diagram

| | | |
|-----------------------------------|-------|-------------------|
| NAME: LED Waterproof Tube Fixture | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: Sedna LED Ltd | SUR.: | PROTECTION ANGLE: |

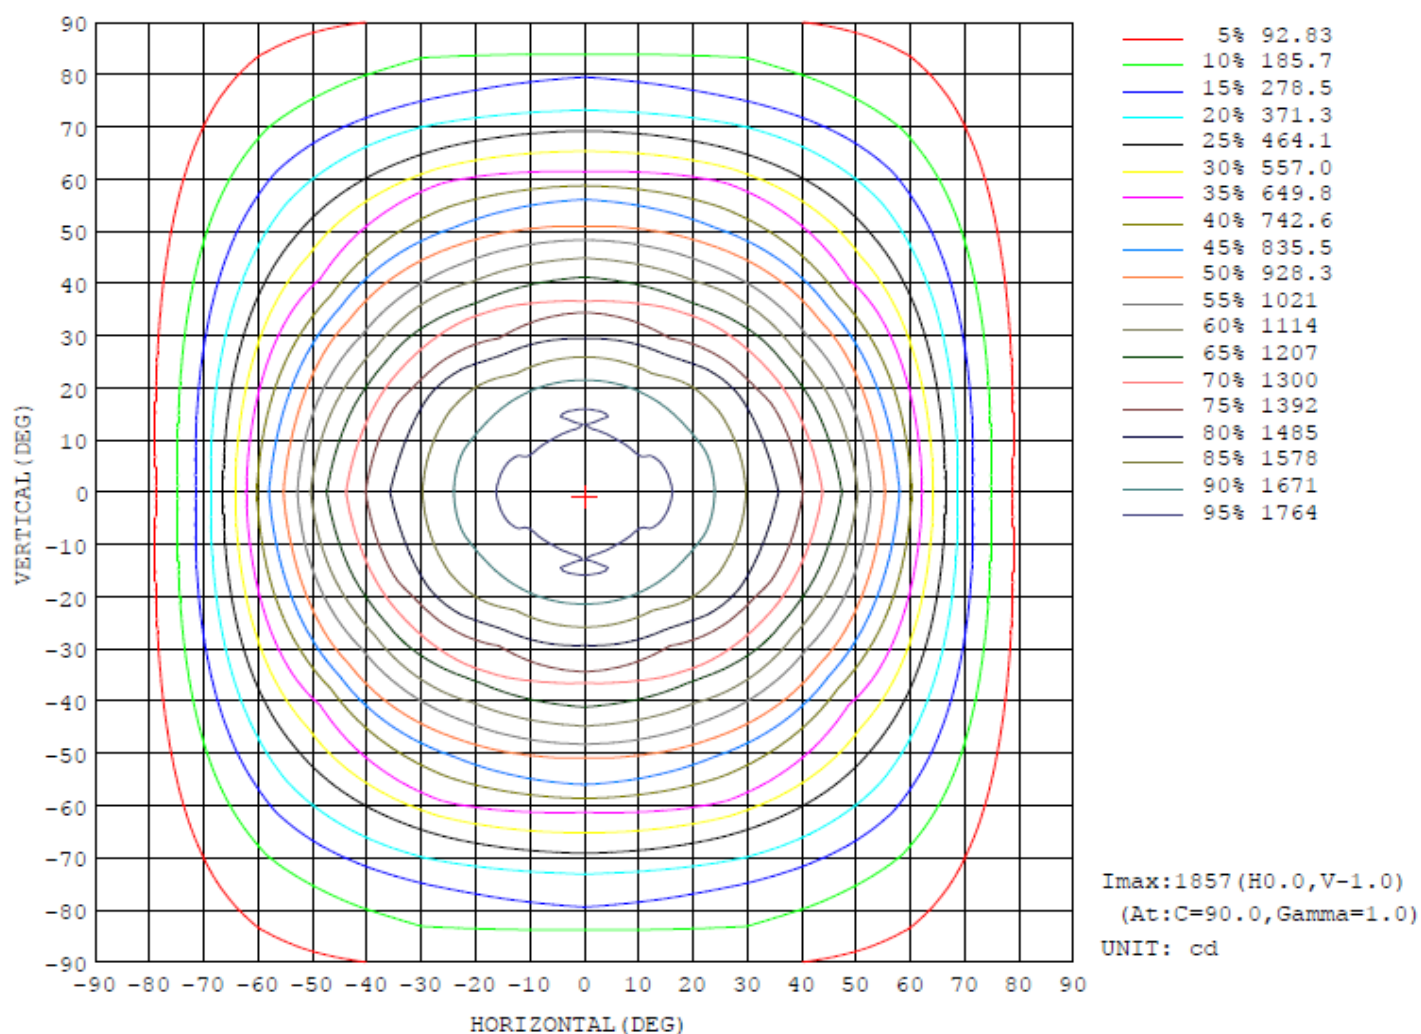

C Range: 0 - 180DEG
Test Speed: MEDIUM
Temperature:25DEG
Operators:Mei Yuanping
Test Date:2014-2-20

γ Range: 0 - 90DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
Humidity:90.0%